

紫外光学玻璃

紫外玻璃特性 (Ultraviolet Glass Characteristic)


牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N _D	$\alpha \times 10^{-7}$ (/°C)	T _g (°C)	T _s (°C)	S
		x	y	Y	x	y	Y	D _A	D _W					
ZJB320	2									1.575				3.23
ZJB340	2							1	3	1.620				3.67
ZJB360	2									1.643	98	487	546	3.72
ZJB380	2							1	2	1.547	98	487	546	2.85

技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	λ tj(nm)	λ_o (nm)	T λ_o (%)	K	
ZJB320	2	320±10	400	≥89.5	≥1.0	
ZJB340	2	340±10	420	≥88.0	≥0.8	
ZJB360	2	360±10	440	≥87.0	≥1.0	
ZJB380	2	380±10	500	≥86.0	≥0.8	

气泡、条纹、应力级别
(Class Of Bubble, Stripe, Stress)

牌 号 Type	气泡 Bubble	条纹 Stiripe	应力 Stress	
ZJB320	C-B	3C	3	
ZJB340	C-B	3C	3	
ZJB360	C-B	3C	3	
ZJB380	B	3C	3	

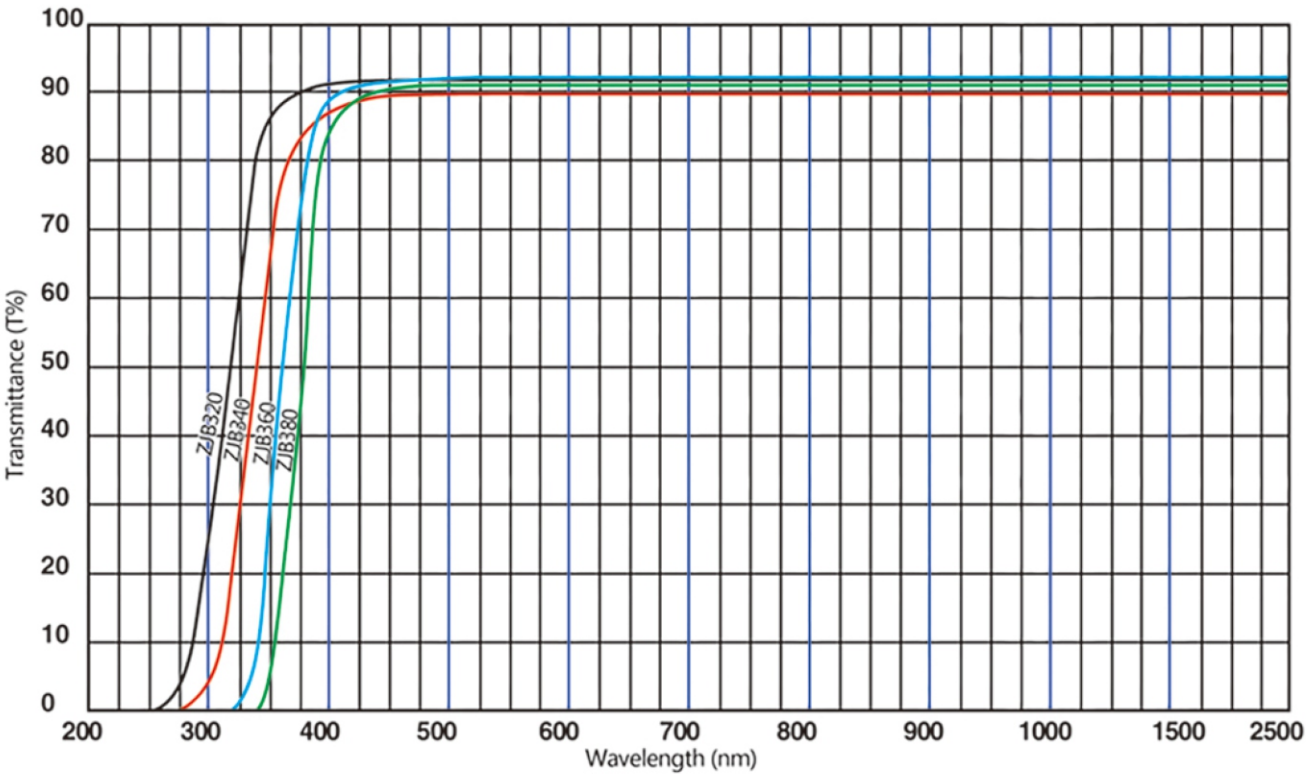

紫外玻璃特性 (Ultraviolet Glass Characteristic)

牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N _D	$\alpha \times 10^{-7}$ (/°C)	T _g (°C)	T _s (°C)	S
		x	y	Y	x	y	Y	D _A	D _W					
ZJB220	2							6	6	1.485	53	502	594	2.27
ZJB240	2							6	6	1.485	53	502	594	2.27
ZJB260	2							1	4	1.508	81	586	656	2.47
ZJB280	2							1	4	1.512	81	586	656	2.52
ZJB300	2							1	4	1.502				2.38

技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	$\lambda_{tj}(nm)$	$\lambda_o(nm)$	T $\lambda_o(\%)$	K	
*ZJB220	2	220±10	300	≥ 89.5	≥ 0.5	
*ZJB240	2	240±10	330	≥ 89.5	≥ 0.5	
ZJB260	2	260±10	340	≥ 89.5	≥ 0.5	
ZJB280	2	280±10	350	≥ 89.5	≥ 0.5	
ZJB300	2	300±10	350	≥ 89.5	≥ 1.0	

气泡、条纹、应力类级别
(Class Of Bubble, Stripe, Stress)

牌号 Type	气泡 Bubble	条纹 Stripe	应力 Stress	
ZJB220	D	3C	3	
ZJB240	D	3C	3	
ZJB260	B	3C	3	
ZJB280	B	3C	3	
ZJB300	B	3C	3	

*为极少生产的玻璃牌号，洽商订购。
The “*” means that some types glasses are produced scarcely,you can consult with us and order it to us.

