

红外透射可见吸收光学玻璃

红外透射可见吸收玻璃特性 (Infrared Glass Characteristic)


牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N _D	α × 10 ⁻⁷ (/°C)	T _g (°C)	T _s (°C)	S
		x	y	Y	x	y	Y	D _A	D _W					
HWB760	3							5	4	1.532	111	534	592	2.77
HWB780	3							5	4	1.532	111	534	592	2.77
HWB800	3							5	4	1.520	98	559	615	3.05
HWB830	3							5	4	1.520	98	559	615	3.05
HWB850	3							5	4	1.520	98	559	615	3.05

技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	λ _{tj} (nm)	λ _o (nm)	T λ _o (%)	K	
HWB760	3	760±10	850	≥83.6	≥0.6	
HWB780	3	780±10	900	≥83.6	≥0.5	
HWB800	3	800±10	900	≥83.6	≥0.5	
HWB830	3	830±10	930	≥83.6	≥0.5	
HWB850	3	850±10	950	≥83.6	≥0.5	

气泡、条纹、应力类别
(Class Of Bubble, Stripe, Stress)

牌号 Type	气泡 Bubble	条纹 Stripe	应力 Stress	
HWB760	C-B	3C	3	
HWB780	C-B	3C	3	
HWB800	C-B	3C	3	
HWB830	C-B	4	3	
HWB850	C-B	4	3	

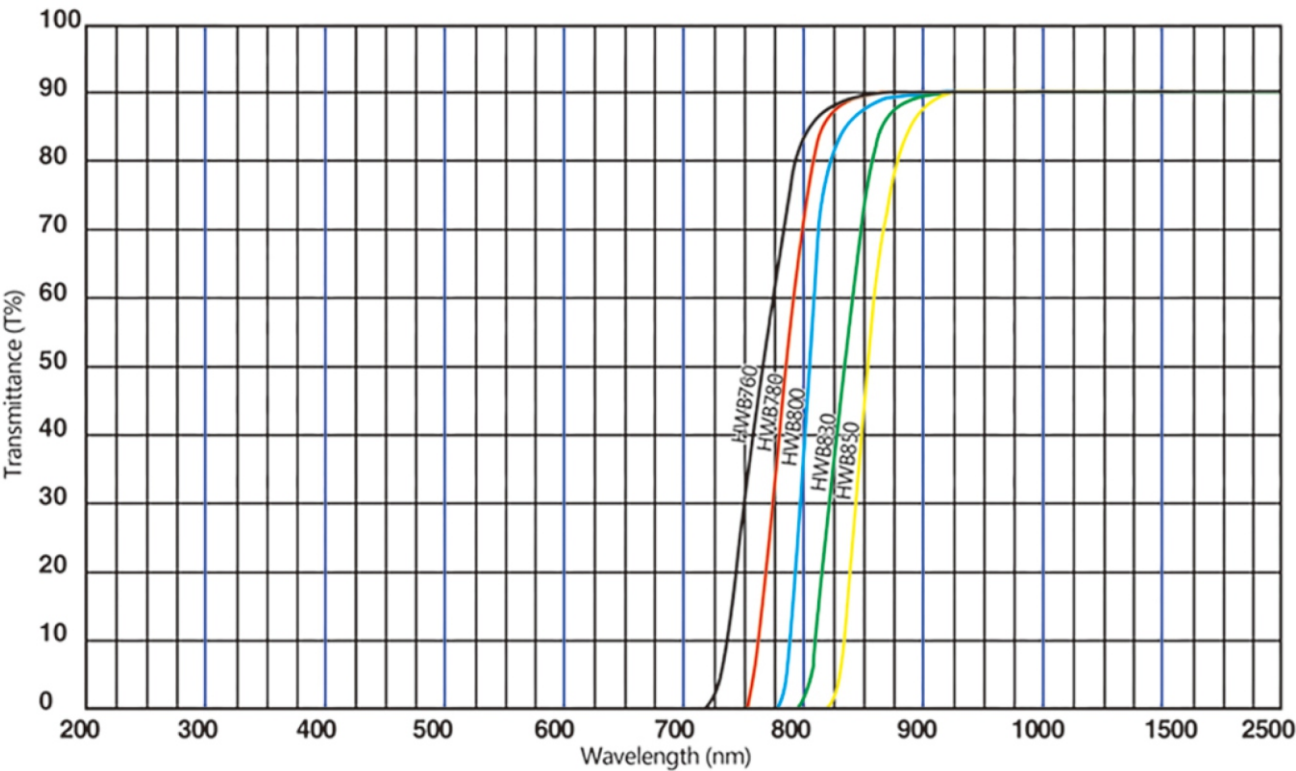

红外透射可见吸收玻璃特性 (Infrared Glass Characteristic)

牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N _D	$\alpha \times 10^{-7}$ (/°C)	T _g (°C)	T _s (°C)	S
		x	y	Y	x	y	Y	D _A	D _W					
HWB900	6							3	3					2.57
HWB930	6							3	3					2.57

技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	λ tj(nm)	λ_o (nm)	T λ_o (%)	K	
*HWB900	6	900±15	1050	≥80.0	≥0.2	
*HWB930	6	930±15	1050	≥80.0	≥0.2	

气泡、条纹、应力类级别
(Class Of Bubble, Stripe, Stress)

牌 号 Type	气 泡 Bubble	条 纹 Stripe	应 力 Stress	
HWB900	C	3C	3	
HWB930	C	3C	3	

*为极少生产的玻璃牌号，洽商定购。
 The “*” means that some types glasses are produced scarcely,you can consult with us and order it to us.

