

升色温玻璃

升色温玻璃特性 (Color Temperature Rising Glass Characteristic)

牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N _D	$\alpha \times 10^{-7}$ (/°C)	T _g (°C)	T _s (°C)	S
		x	y	Y	x	y	Y	D _A	D _W					
SSB40	2	0.415	0.403	63.0	0.283	0.305	64.1	2	4	1.521	87	585	638	2.58
SSB130	2	0.358	0.399	36.3	0.242	0.277	39.4	2	4	1.521	102	602	672	2.57
SSB145	2	0.361	0.372	22.1	0.239	0.243	23.7	2	4	1.521	87	585	638	2.58


技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	v(Mired)				
		标准 Standard	公差 Range			
SSB40	2	-40	-40±4			
SSB130	2	-130	-130±13			
SSB145	2	-145	-145±14.5			

气泡、条纹、应力类别
(Class Of Bubble, Stripe, Stress)

牌 号 Type	气 泡 Bubble	条 纹 Stripe	应 力 Stress	
SSB40	C	3C	3	
SSB130	C	3C	3	
SSB145	C	3C	3	

注：色温玻璃允许调节玻璃厚度达到所需mired值。
The thickenss of the color temperature transformation glass can be adjusted to the value of "Mired" for application.

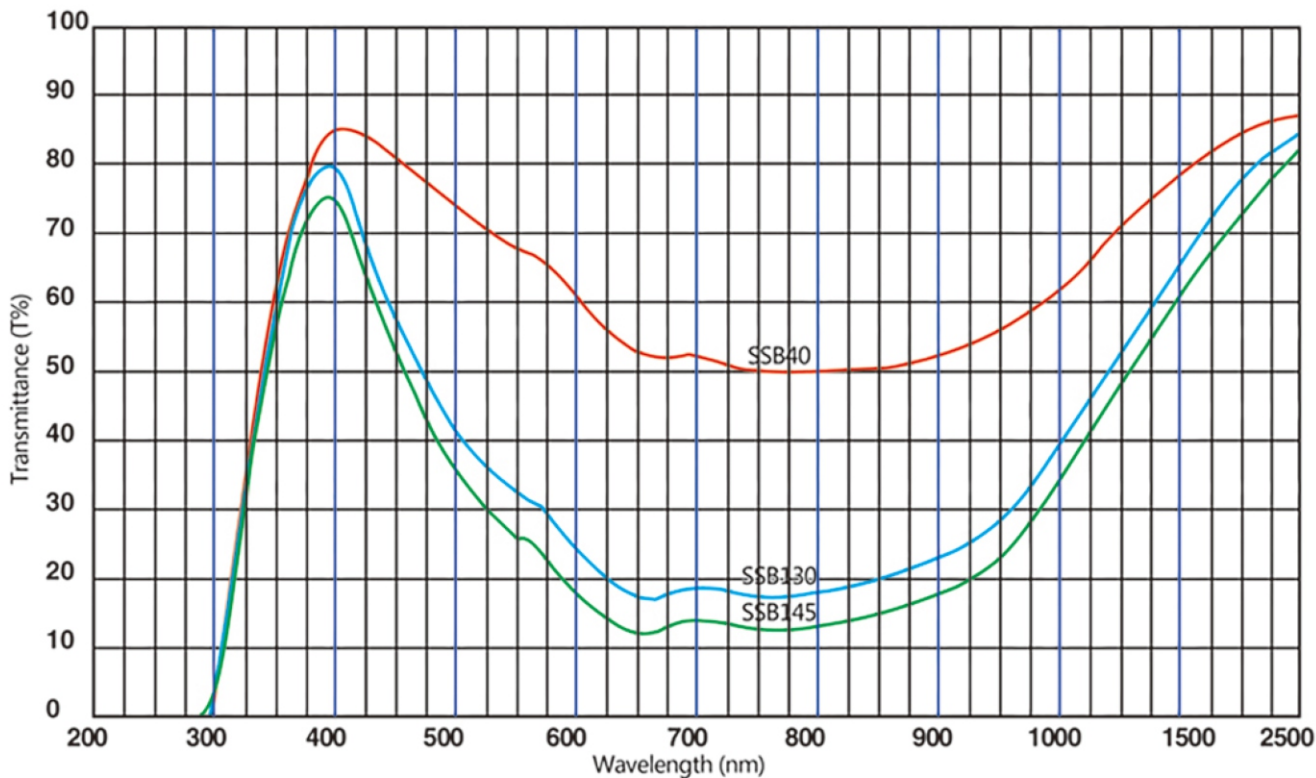

升色温玻璃特性 (Color Temperature Rising Glass Characteristic)

牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N _D	$\alpha \times 10^{-7}$ (/°C)	T _g (°C)	T _s (°C)	S
		x	y	Y	x	y	Y	D _A	D _W					
SSB165	2	0.340	0.360	15.4	0.227	0.224	16.9	2	4	1.521	87	585	638	2.58
SSB200	2	0.318	0.348	10.1	0.214	0.209	11.4	2	4	1.521	87	585	638	2.58

技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	v(Mired)				
		标准 Standard	公差 Range			
SSB165	2	-165	-165±16.5			
SSB200	2	-200	-200±20			

气泡、条纹、应力类别
(Class Of Bubble, Stripe, Stress)

牌 号 Type	气 泡 Bubble	条 纹 Stripe	应 力 Stress	
SSB165	C	3C	3	
SSB200	C	3C	3	

