

降色温玻璃

降色温玻璃特性 (Color Temperature Falling Glass Characteristic)


牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N _D	$\alpha \times 10^{-7}$ (/°C)	T _g (°C)	T _s (°C)	S
		x	y	Y	x	y	Y	D _A	D _W					
SJB20	2	0.469	0.413	87.8	0.339	0.349	83.6	2	3	1.525	87	571	642	2.63
SJB80	2	0.494	0.415	75.3	0.372	0.368	69.2	2	3	1.525	87	571	642	2.63
SJB100	2	0.510	0.410	67.8	0.395	0.381	61.0	2	3	1.525	103	513	591	2.70

技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	v(Mired)				
		标准 Standard	公差 Range			
SJB20	2	20	20±2			
SJB80	2	80	80±8			
SJB100	2	100	100±10			

气泡、条纹、应力类级别
(Class Of Bubble, Stripe, Stress)

牌号 Type	气泡 Bubble	条纹 Stripe	应力 Stress	
SJB20	C	3C	3	
SJB80	C	3C	3	
SJB100	C	3C	3	

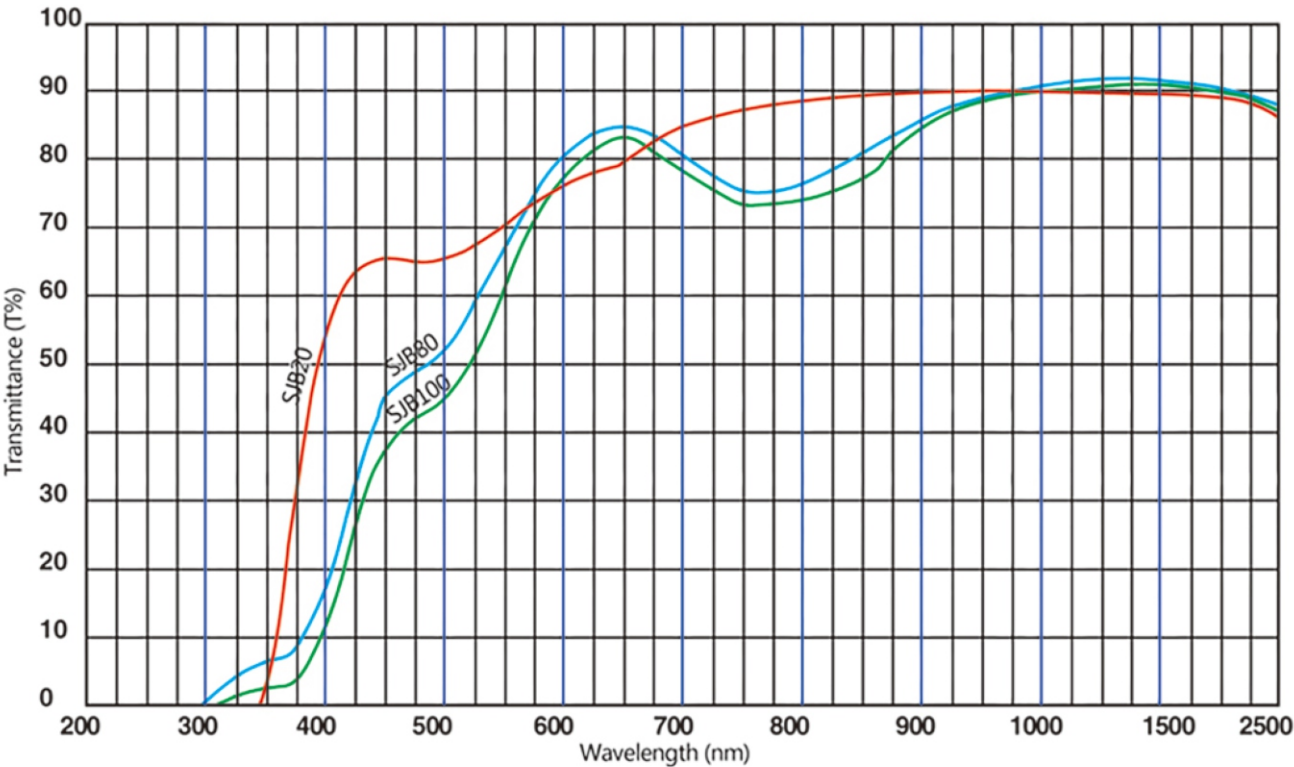

降色温玻璃特性 (Falling Color Temperature Glass Characteristic)

牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N _D	$\alpha \times 10^{-7}$ (/°C)	T _g (°C)	T _s (°C)	S
		x	y	Y	x	y	Y	D _A	D _W					
SJB130	2	0.548	0.409	52.1	0.455	0.405	44.2	2	3	1.525	103	513	591	2.70
SJB140	2							2	3	1.525	103	513	591	2.70

技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	v(Mired)				
		标准 Standard	公差 Range			
SJB130	2	130	130±13			
SJB140	2	140	140±14			

气泡、条纹、应力类别
(Class Of Bubble, Stripe, Stress)

牌号 Type	气泡 Bubble	条纹 Stripe	应力 Stress	
SJB130	C	3C	3	
SJB140	C	3C	3	

