

中性暗色玻璃

中性暗色玻璃特性 (Neutral Density Glass Characteristic)


牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N_D	$\alpha \times 10^{-7}$ (/°C)	T_g (°C)	T_s (°C)	S
		x	y	Y	x	y	Y	D_A	D_W					
ZAB00	0.5							5	3	1.527	65	469	582	2.46
ZAB02	1							5	3	1.514	65	469	582	2.41
ZAB2	2	0.447	0.396	1.1	0.306	0.315		5	3	1.509	65	469	582	2.43
ZAB5	2							5	4	1.505	65	469	582	2.42
ZAB10	2	0.434	0.402	9.0	0.297	0.314		1	3	1.526	65	469	582	2.52

技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	v (Mired)		Q_z (%)		
		标准 Standard	公差 Range			
ZAB00	0.5	2.0	1.0~4.0	≤ 4.0		
ZAB02	1	1.5	0.5~3.0	≤ 3.0		
ZAB2	2	2.0	1.0~3.0	≤ 3.0		
ZAB5	2	5.0	1.0~9.0	≤ 5.0		
ZAB10	2	10.0	6.0~15.0	≤ 5.0		

气泡、条纹、应力类级别
(Class Of Bubble, Stripe, Stress)

牌号 Type	气泡 Bubble	条纹 Stripe	应力 Stress	
ZAB00	C-B	4	3	
ZAB02	C-B	4	3	
ZAB2	C-B	4	3	
ZAB5	C-B	4	3	
ZAB10	C-B	4	3	

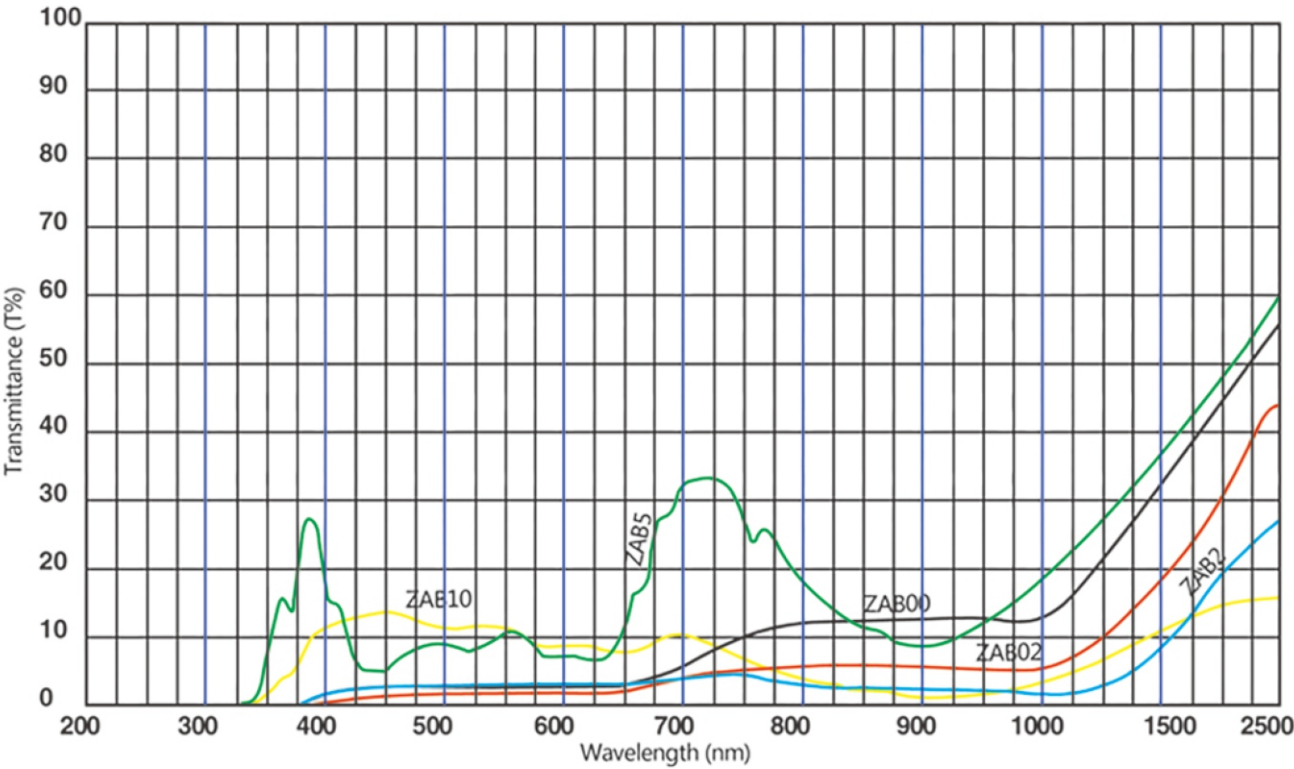

中性暗色玻璃特性 (Neutral Density Glass Characteristic)

牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N _D	$\alpha \times 10^{-7}$ (/°C)	T _g (°C)	T _s (°C)	S
		x	y	Y	x	y	Y	D _A	D _W					
ZAB25	2	0.442	0.408	25.7	0.308	0.327	25.4	5	3	1.502	65	469	582	2.41
ZAB30	2							1	3	1.523	65	469	582	2.52
ZAB50	2	0.444	0.408	45.7	0.310	0.329	45.0	5	3	1.502	65	469	582	2.41
ZAB65	2							1	3	1.521	65	469	582	2.52
ZAB70	2	0.499	0.410	70.2	0.316	0.385	68.7	5	3	1.502	65	469	582	2.41

技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	v(Mired)		Qz (%)		
		标准 Standard	公差 Range			
ZAB25	2	25	18.0~32.0	≤6.0		
ZAB30	2	30	23.0~37.0	≤10.0		
ZAB50	2	50	41.0~59.0	≤8.0		
ZAB65	2	65	58.0~72.0	≤6.0		
ZAB70	2	70	63.0~77.0	≤7.0		

气泡、条纹、应力类别
(Class Of Bubble, Stripe, Stress)

牌号 Type	气泡 Bubble	条纹 Stripe	应力 Stress	
ZAB25	C-B	4	3	
ZAB30	C-B	4	3	
ZAB50	C-B	3C	3	
ZAB65	C-B	3C	3	
ZAB70	C-B	3C	3	

