

金黄色（黄色）光学玻璃

金黄色(黄色)玻璃特性 (Golden(yellow) Glass Characteristic)


牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N _D	α × 10 ⁻⁷ (/°C)	T _g (°C)	T _s (°C)	S
		x	y	Y	x	y	Y	D _A	D _W					
JB400	2	0.450	0.410	96.3	0.316	0.336	94.2	1	1	1.632	95	497	555	3.65
JB420	2	0.455	0.414	93.1	0.323	0.346	90.8	2	3	1.632	95	497	555	3.69
JB450	2	0.492	0.461	94.7	0.401	0.488	90.7	1	3	1.523	103	527	605	2.64

技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	λ t _j (nm)	λ _o (nm)	T λ _o (%)	K	
JB400	2	400±10	560	≥86.0	≥0.6	
JB420	2	420±10	560	≥86.0	≥0.6	
JB450	2	450±10	560	≥89.5	≥0.6	

气泡、条纹、应力类别
(Class Of Bubble, Stripe, Stress)

牌 号 Type	气泡 Bubble	条纹 Stripe	应力 Stress	
JB400	C-B	3C	3	
JB420	C-B	3C	3	
JB450	C-B	3C	3	

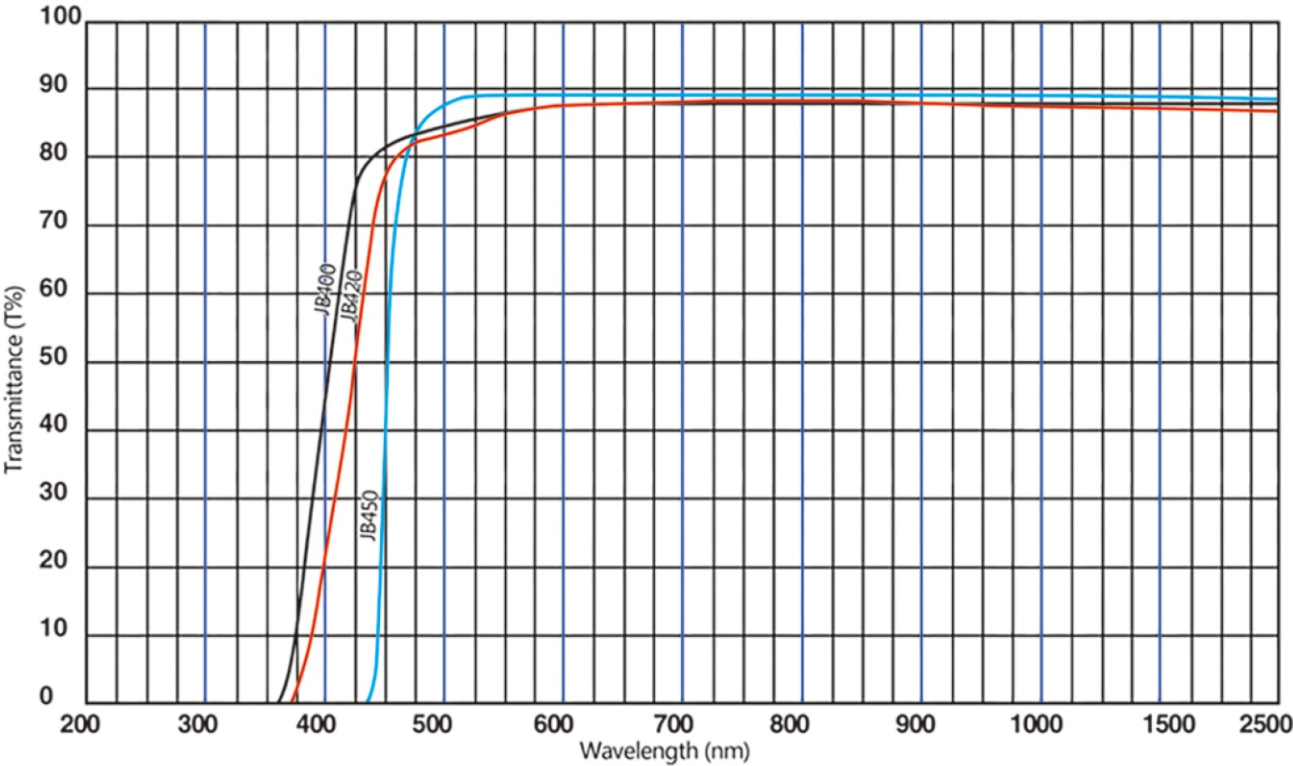

金黄色(黄色)玻璃特性 (Golden(yellow) Glass Characteristic)

牌 号 Type	厚度 Thickness (mm)	A[2856K]			D65			化学稳定性 Chemical Stability		N _D	$\alpha \times 10^{-7}$ (/°C)	T _g (°C)	T _s (°C)	S
		x	y	Y	x	y	Y	D _A	D _W					
JB470	2	0.492	0.462	96.0	0.401	0.490	92.0	1	3	1.523	103	527	605	2.64
JB490	2	0.502	0.468	94.5	0.422	0.514	89.6	1	3	1.523	103	527	605	2.64
JB510	2	0.519	0.471	91.5	0.456	0.526	84.0	1	2	1.523	103	527	605	2.64
JB520	2							1	2	1.523	103	527	605	2.64

技术要求
(Technical Indexes)

牌 号 Type	厚度 Thickness (mm)	λ tj(nm)	λ_o (nm)	T λ_o (%)	K	
JB470	2	470±10	560	≥89.5	≥0.8	
JB490	2	490±10	580	≥89.5	≥1.2	
JB510	2	510±10	600	≥89.5	≥1.2	
JB520	2	520±6	600	≥89.5	≥1.2	

气泡、条纹、应力类级别
(Class Of Bubble, Stripe, Stress)

牌号 Type	气泡 Bubble	条纹 Stripe	应力 Stress	
JB470	C-B	3C	3	
JB490	C-B	3C	3	
JB510	C-B	3C	3	
JB520	C-B	3C	3	

